


ALU LAMELLA MAT, KLIMAFIX

PRODUCT DESCRIPTION	Mineral wool mats ROCKWOOL with reinforced alu-foil facing
TECHNICAL APPROVAL	COBRTI „INSTAL” Nr AT/2002-02-1228-02
APPLICATION	Mats are designed for thermal, acoustic and anti-condensation insulation of flat and cylindrical surfaces both in horizontal and vertical systems.
HEAT CONDUCTIVITY	$\lambda_{10} \leq 0,042$ [W/m·K]
TECHNICAL PARAMETERS	Maximum value of continuous temperature of thermal energy conveyor of the insulated devices: 250°C, for KLIMAFIX mat: 50°C. Fire class: non-combustible



Application model

Anti-condensation insulation of ventilation ducts

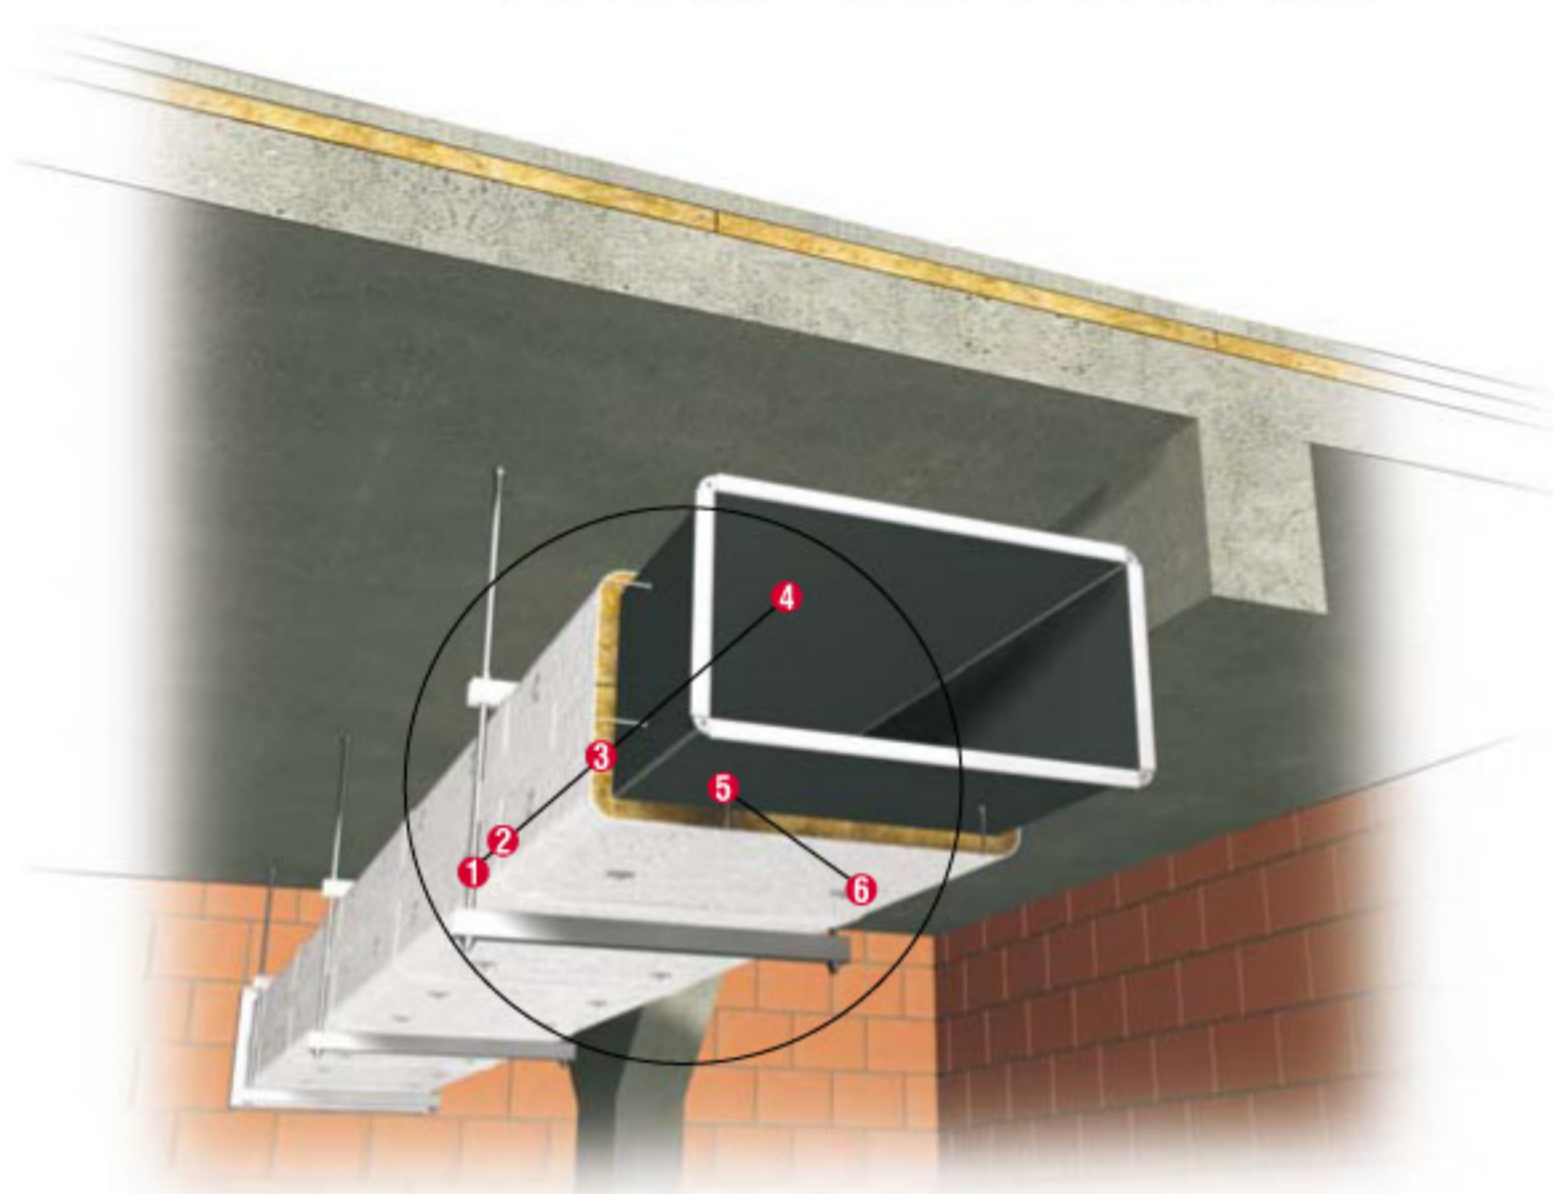

1	Chanel sling
2	Self-adhesive aluminium tape
3	ALU LAMELLA MAT
4	Ventilation duct
5	Welded bolts
6	Self-seizing overlap

PLEASE NOTE: A new way of packing

Lamella Mat and Klimafix are delivered only on pallets.
One pallet contains 20 rolls.

ALU LAMELLA MAT

PKWiU: 26.82.16-30.10

length	length	thickness	product code	m ² / pack	m ² / pallet	delivery group acc. to GDT
[mm]	[mm]	[mm]		[m ²]	[m ²]	
10 000	1000	20	10048	10,0	200,0	A
8000	1000	30	10047	8,0	160,0	A
6000	1000	40	33025	6,0	120,0	A
5000	1000	50	10046	5,0	100,0	A
2500	1000	100	33029	2,5	50,0	*

*Non-standard product, with delivery date determined individually and specified on the order confirmation.

KLIMAFIX (self-adhesive lamella mat)

PKWiU: 26.82.16-30.10

length	length	thickness	product code	m ² / pack	m ² / pallet	delivery group acc. to GDT
[mm]	[mm]	[mm]		[m ²]	[m ²]	
10 000	1000	20	10052	10,0	200,0	A
8000	1000	30	10051	8,0	160,0	A
6000	1000	40	12569	6,0	120,0	A
5000	1000	50	10050	5,0	100,0	A